

Performance Analysis of Queuing Disciplines for Difference Services Using OPNET Tool

K.Balasundaram, T.Velmurugan, R.Suresh

School of Electronics Engineering, VIT University Vellore.

balasundaram82@gmail.com, velu_251@rediffmail.com, sureshrajendran@live.com

Abstract— *Now a day Internet only provides Best Effort Service. Traffic is processed as earliest as possible, but there is no assurance of timelines or real delivery. With the fast transformation of the Internet into a commercial infrastructure, demands for service quality have quickly developed. People of the current world are very much dependent on various network services like VOIP, Videoconferencing and File Transfer. Different types of Traffic Management systems are used in those services. Queuing is one of the very important mechanisms in traffic management system. Each router in the network must implement some queuing discipline that governs how packets are buffered while waiting to be transmitted. This paper gives a comparative analysis of three queuing systems FIFO, PQ and WFQ. The study has been carried out on some issues like: Traffic dropped Traffic Received and packet end to end delay and the simulation results shows that WFQ technique has a better-quality than the other techniques.*

Keywords— *FIFO queue, Priority queue, Weighted-fair queue, QoS,*

1. Introduction

People of the modern world are very much dependent on various network services like VOIP, Videoconferencing and File Transfer. Different types of Traffic Management systems are used in those services. Queuing is one of the very vital mechanisms in traffic management system. Each router in the network must implement some queuing discipline that governs how packets are buffered while waiting to be transmitted. This paper gives a comparative analysis of three queuing systems FIFO, PQ and WFQ [1]. The study has been carried out on some issues like: Traffic dropped Traffic Received and packet end to end delay and the simulation results shows that WFQ technique has a superior quality than the other techniques.

Packet Handling Techniques

Various queuing disciplines can be used to control which packets get transmitted and which packets which packets get dropped [3].

The queuing disciplines are:

1. First-in-first-out (FIFO) queuing.
2. Priority Queuing (PQ)
3. Weighted-Fair queuing. (WFQ)

FIFO is an short form for First In First Out .This appearance describes the principle of a queue or first-come first serve behavior: what comes in first is handled first, what comes in next waits until the first is finished etc. Thus it is similar to the behavior of persons “standing in a line” or “Queue” where the persons leave the queue in the order they arrive. First In First Out (FIFO) is the most essential queuing discipline. In FIFO

Queuing all packets are treated equally by placing them into a single queue, then servicing them in the same order they were placed in the queue. FIFO queuing is also referred to as First Come First Serve (FCFS) queuing Priority Queuing assigns multiple queues to a network interface with each queue being given a priority level. A queue with higher priority is processed earlier than a queue with lower priority. Priority Queuing has four preconfigured queues, high medium, normal and low priority queue. By defaulting each of these queues has 20, 40, 60 and 80 packets capacity

If packets reach your destination in the high queue then priority queuing drops everything its doing in order to transmit those packets, and the packets in other queue is again empty. When a packet is sent out an interface, the priority queues on that interface are scanned for packets in descending order for priority. The high priority Queue is scanned first, then the medium priority queue and then so on. The packet at the head of the highest queue is chosen for transmission. This procedure is repeated every time when a packet is to be sent. The maximum length of a queue is defined by the length limit. When a queue is longer the limit packets are dropped In QoS, a flow-based queuing algorithm that schedules low-volume traffic first, while letting high-volume traffic share the remaining bandwidth. This is handled by assigning a weight to each flow, where lower weights are the first to be serviced WFQ is a generalization of fair queuing (FQ) [2]. Both in WFQ and FQ, each data flow has a separate FIFO queue. In FQ, with a link data rate of R , at any given time the N active data flows (the ones with non-empty queues) are serviced at the same time, each at an average data rate of R/N . Since each data flow has its own queue, an ill-behaved flow (who has sent larger packets or more packets per second than the others since it became active) will only punish itself and not other sessions Here different queuing discipline in the routers can affect the performance of the applications and the utilization of the network resources [5].

2. NETWORK SCENARIO DIAGRAM

In this paper, three simulation models of network topology have been tested to evaluate network performance [6]. Each topology consists of different number of routers with the similar type of traffic have been implemented to generate the desired result. First scenario is a single traffic with function as a FTP, Video conferencing and VoIP using 2 routers as shown in figure 1(a). The Second scenario is modified in figure 1(b) with the increased number of routers and traffic applied. Figure 1(c) shows the topology used to generate the highest number of traffic concerned. The three techniques used for the simulation models are FIFO, PQ and WFQ [7].

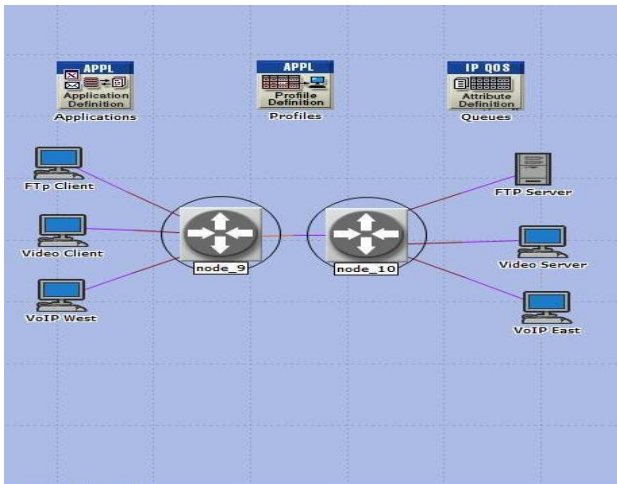


Figure 2 (a) Network scenario with Low number of traffic

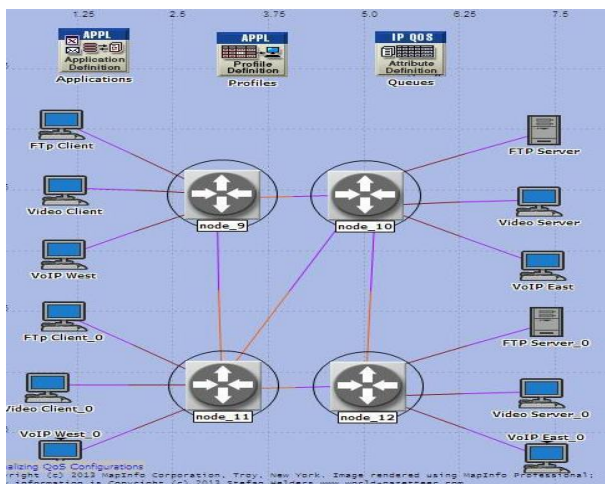


Figure 2 (b) Network scenario with Medium number of traffic

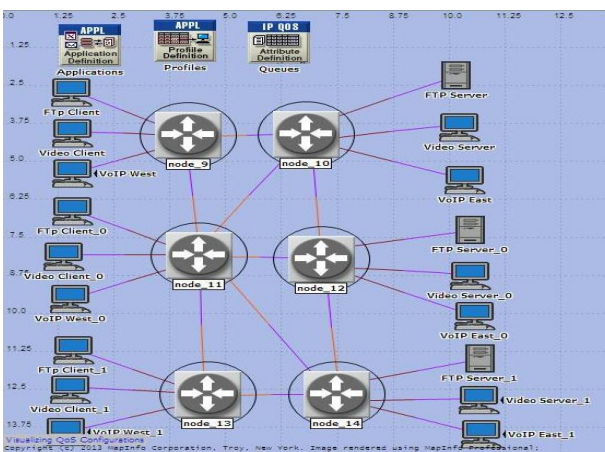


Figure 2 (c) Network scenario with High number of traffic

OPNET MODELER has been used in the network simulations to generate result based on the Video conferencing, VoIP and FTP. Different queuing techniques have been implemented to evaluate network performance based on the parameters such as of packet dropped, traffic received, packet end-to-end delay, packet delay variation, and video conferencing traffic have analyzed and discussed.

3. SIMULATION RESULTS AND PERFORMANCE COMPARISON

3.1 IP Traffic Dropped

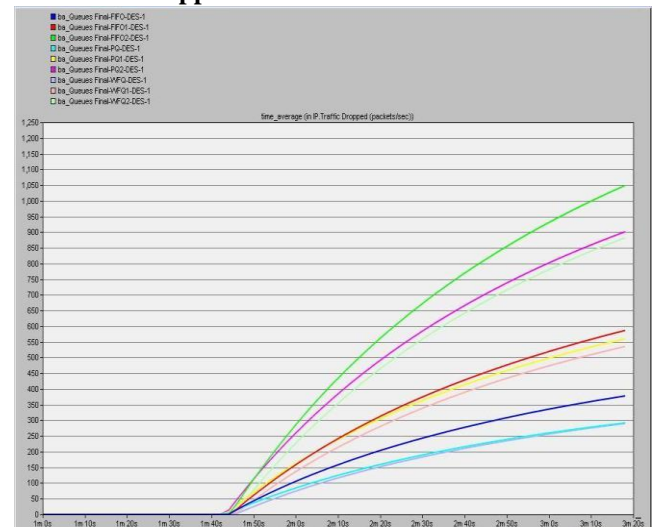


Figure 3.1 shows Low, Medium and High Traffic Condition: When the traffic in the network is Low, Medium and high we observe that the packet drop would be more in FIFO Queuing technique rather than PQ and WFQ.

3.2 VoIP Traffic Received

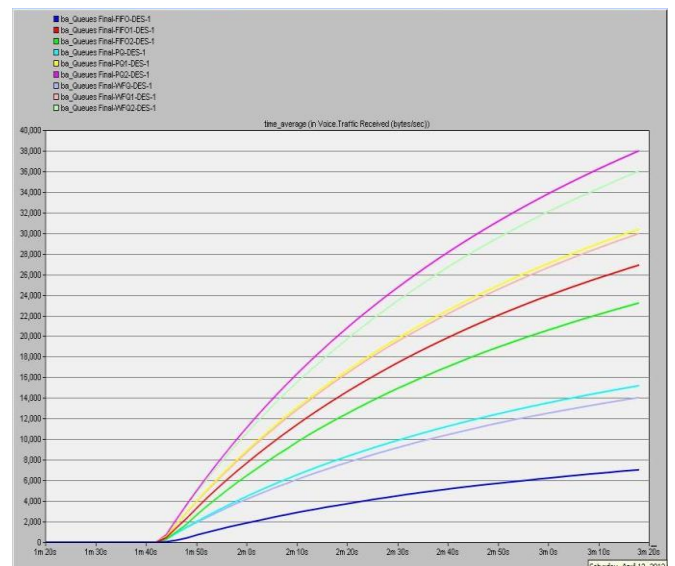


Figure 3.2 shows Low, Medium and High VoIP Traffic Received Condition: When the VoIP Traffic Received in the network is Low, Medium and High we observe that the traffic received would be more in Priority Queuing and WFQ technique rather than FIFO. Packet classification is based on sources, destination address and protocol for WFQ help VoIP received high number of traffic.

3.3 Video Conferencing Received

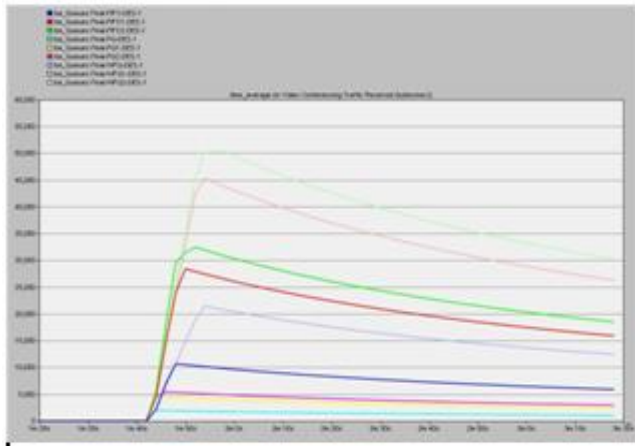


Figure 3.3 Video Conferencing Received

Figure 3.3 shows traffic received for video conferencing, the maximum traffic received is WFQ and the least traffic received is PQ. The high quality video of video conference [8] is need requires less disruption in network connection. WFQ in every scenario in figure produced low distortion in video.

3.4 FTP Traffic Received

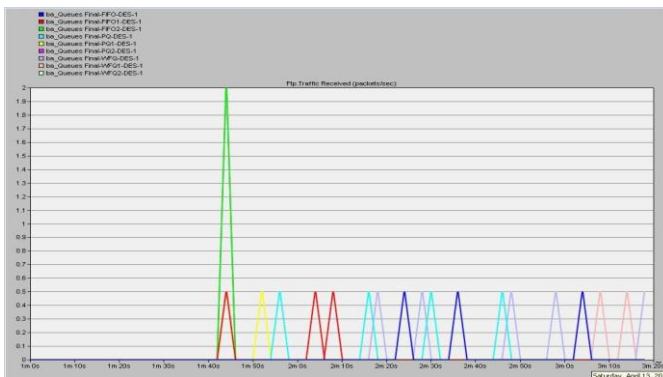


Figure 3.4 FTP Traffic Received

Figure 3.4 shows the output for traffic received when implementing FTP. The traffic received is at average at 0.5 packets even the traffic is increased in every scenario. FIFO Medium Traffic Scenario received 1.5 packet and traffic is increased the FIFO High Traffic Scenario. It is observed that the amount of traffic used has less effect for FTP traffic received.

3.5 Voice Packed End to End Delay

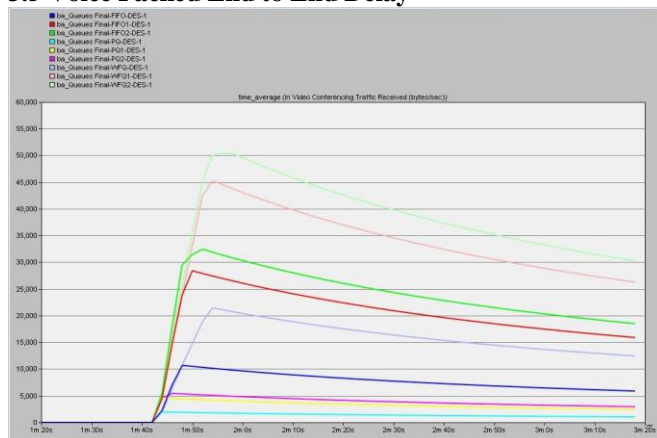


Figure 3.5 Voice Packet End to End Delay

Figure 3.5 shows the packet end-to-end delay for VoIP based on the queuing technique PQ and WFQ for all scenarios is always closed to zero and FIFO is constantly higher. When the traffic is increased, the value of packet end-to-end delay for FIFO is also increased. The classification packet in queuing is not applied in FIFO packet end-to-end delay for VoIP which includes buffering delay, transmission delay and codec delay. FIFO has produced poor effects on quality of speech during conversation.

3.6 Video Conference Packed End to End Delay

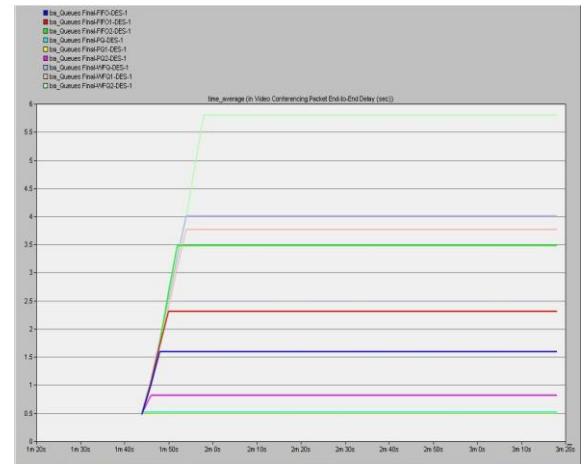


Figure 3.6 Video Conference Packet End to End Delay

Figure 3.6 shows the packet end-to-end delay for Video conference. PQ is always near the value of zero even the traffic is increased. The traffic is increased in packet end to end delay and WFQ delay follow to increase with FIFO is maintain increased with highest in every scenario. The effect of High resolution video used in video conference has increased the FIFO packet end to end delay.

3.7 Voice Delay Variation

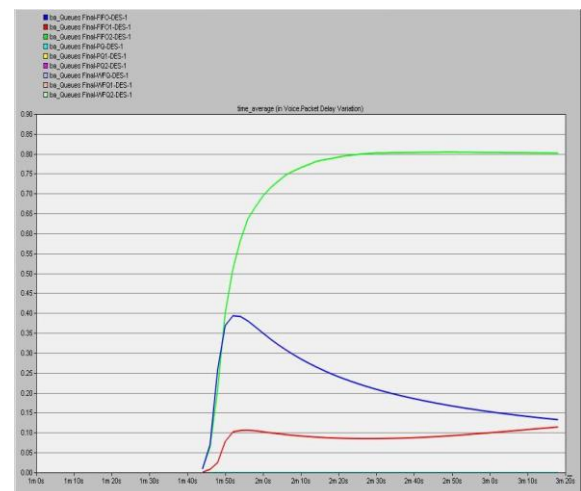


Figure 3.7 Voice Delay Variation

Figure 3.7 shows the packet delay variation for VoIP[9]. The packet delay variation using technique PQ and WFQ for all scenarios is always at zero but FIFO is always higher. The first scenario 1 (FIFO) shows the packet delay variation from time to time for FIFO is decreased and increased at scenario 3 (FIFO) from time to time. Time needed to fill a packet include encoded and compressed the speech increased on FIFO. Buffering delay has occurred because frame of voice has to wait for other frame of voice in ahead queuing to play-out.

3.8 Video Conferencing Delay Variation

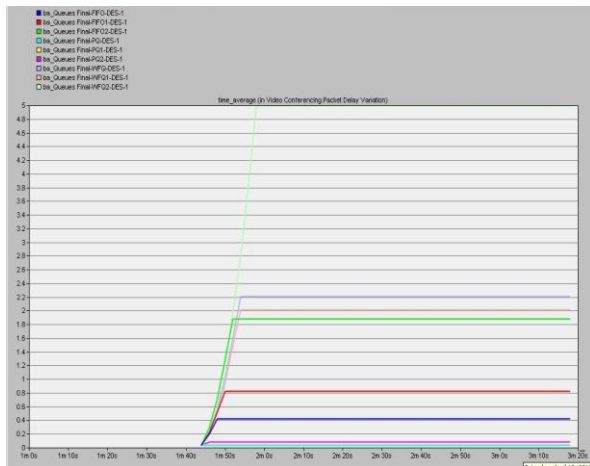


Figure 3.8 Video Conferencing Delay Variation

Figure 3.8 shows the packet delay variation for Video Conferencing. It is observed that when the traffic is increased the packet delay variation for WFQ and FIFO is also increased; whilst PQ is always zero for all traffic applied. Application for video conference have been given higher priority to help traffic flow with less jitter where PQ implementation used service classes with different priority that help the high resolution of video conference to maintain the quality of video to be received.

4. Conclusion

Based on the simulation results obtained, the network performance of queuing technique was compared. The evaluation between different queuing for VoIP and video conference, it is concluded that the best technique in queuing is PQ due to the lower value in packet end to end delay and packet delay variation. The effect of high resolution video shown the WFQ has increased the packet delay variation in Video conference and produced a higher value in packet end to end delay.

FIFO produced better performance as compared to WFQ. The next comparison for file receiving and video conference shows that FIFO gave the best performance although there was a traffic dropped. The new scheme (AWFQ) is the improvement of WFQ could be implemented to further reduce the delay in video conference, thus increases the performance of WFQ technique and QoS. The improvement of PQ techniques can be done with the implementation of Dynamic PQ to increase the Traffic Received in video conference. This will make PQ the best queuing technique to be used due to lower Delay produced as compared to other technique.

5. References

- i. T. Velmurugan, Himanshu Chandra, and S. Balaji, "Comparison of Queuing Disciplines for Differentiated Services using OPNET", in *International Conference On Advances in Recent Technologies in Communication and Computing (ARTCom'09)*, IEEE, October 2009, pp. 744-746.
- ii. Al-Sawai, A Performance of Weighted Fair Queuing System with Multi-class Jobs Sch. of Comput., Univ. of Bradford, Bradford, UK, 2010.
- iii. J. Kurose and K. Ross, "Computer Networking: A Top-Down Approach Featuring the Internet," 3rd ed. Addison Wesley, 2005.
- iv. Davide Astuti, Packet Handling Department of Computer Science University of Helsinki, Helsinki, Finland. 2003.
- v. C. Semeria, "Supporting Differentiated Service Classes: Queue Scheduling Disciplines," White Paper, Juniper Networks, Inc., 2001.
- vi. G. Bolch, S. Greiner, H. Meer, and K. S. Trivedi, "Queueing Networks and Markov Chains" John Wiley and Sons, 1998.
- vii. Mohammad Mirza Golam Rashed. A Comparative study of different Queuing technique in voip, video conference and file transfer. Dept of ETE, Daffodil International University. 2011.
- viii. M. M. G. Rashed, M. Kabir, "A comparative study of different queuing techniques in VOIP, video conferencing and file transfer", *Daffodil International University Journal of Science and Technology*, vol. 5, no. 1, pp. 37-47, 2010.
- ix. Mitko Gospodinov, "The effect of different queuing disciplines over FTP, Video and VoIP performance", in *international Conference on computer systems and technologies*, pp 1-5, 2004.